

PS-448/448S

Wall-mounted Dynamic Microphones

Description

PRA-448 and PRA-448S are omni-directional dynamic microphones designed to install on wall. With their special frequency response, they can give a crisp, clear, and bright sound. Both the two are installed with firm, anti-shock and low-impedance capsules. PRA-448S also has a single-pole double-throw (SPDT) button switch for other connecting modes.

PRA-448 and PRA-448S are mainly used for the miking and talkback in places such as: warehouse, factory, school, restaurant, snack bar, apartment, and safety inspection, etc.


Specifications

- Type: Dynamic
- Polar Pattern: Omni-directional
- Frequency Response: 150~4500Hz
- Sensitivity: -51dB (0dB=1mv/10μ bar)
-68dB (0dB=1V/μ bar)
-14dB EIA
- Rated Impedance: 500
- Switch (PRA-448S): SPDT sealed button microswitch
- Dimension: See map below
- Net Weight: 85g (3 oz)
- Finish: Ground stainless steel



PRA-448

PRA-448S

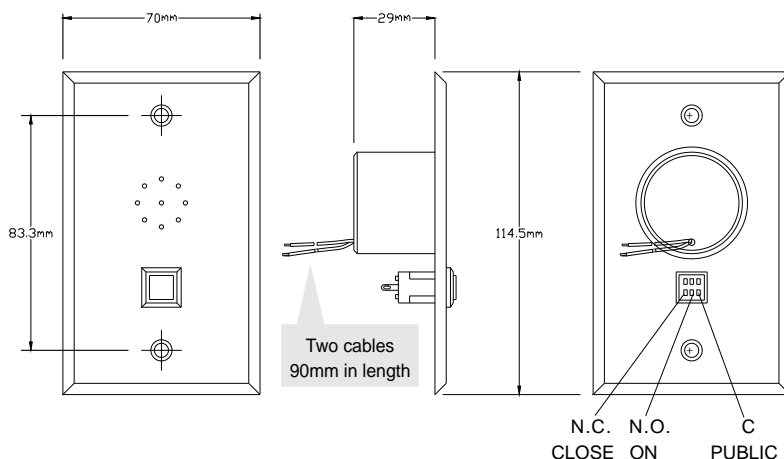

Frequency Response

