

PRA535NC

抗噪聲手握式動圈麥克風


概述

PRA-535NC 是手握式抗噪聲動圈式麥克風，其換能器的聲學結構設計先進、可靠，具有良好抗噪聲和可懂度。PRA-535NC 麥克風特適用於高噪聲移動環境做語言通信。如各種車輛、船隻、民用航空器等。

特徵

- 對環境噪聲有良好的抑制作用
- 具有良好的語言清晰度和可懂度
- 能承受高溫、高濕、震動或跌落
- 外殼抗腐蝕（油性、酸或鹼性）
- 具有 Press-to-talk 開關，壽命達 20 萬次


接線圖

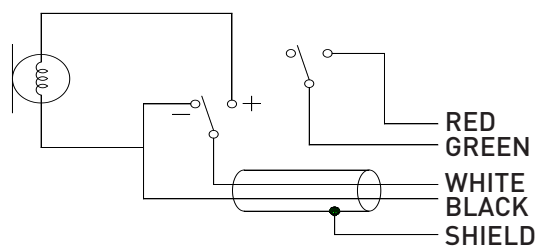

規格技術

類型	抗噪型動圈式
頻率響應	100 - 5000 Hz
靈敏度	-66 dBV/Pa (0.5 mV/Pa)
標稱阻抗	200 Ω
操作溫度範圍	-40°C ~ 74°C (-104 °F ~ 165 °F)
開關類型	Press - to - talk
電纜線	∅ 6.3 mm x 3.4 M (∅ 1/4" x 11ft)
重量	含線 250 g (8.8 oz) 托架 20 g (0.7oz)

PRA535NC 頻率響應圖

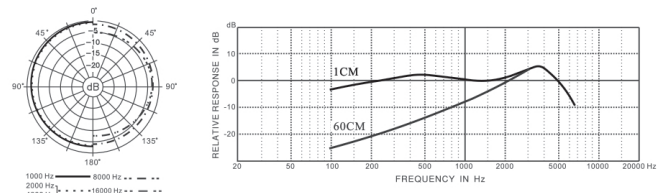

PRA535NC

抗噪声手握式动圈麦克风


概述

PRA-535NC 是手握式抗噪声动圈式麦克风，其换能器的声学结构设计先进，可靠，具有良好抗噪声和可懂度。PRA-535NC 麦克风特适用于高噪声移动环境做语言通信。如各种车辆、船只、民用航空器等。

特征

- 对环境噪声有良好的抑制作用
- 具有良好的语言清晰度和可懂度
- 能承受高温，高湿，震动或跌落
- 外壳抗腐蚀（油性，酸或碱性）
- 具有 Press-to-talk 开关，寿命达 20 万次


接线图

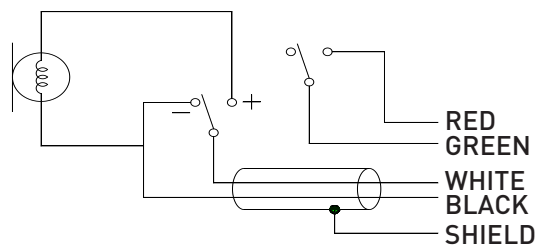

规格技术

类型	抗噪型动圈式
频率响应	100 - 5,000 Hz
灵敏度	-66 dBV / Pa (0.5mV / Pa)
标称阻抗	200Ω
操作温度范围	-40°C ~ 74°C (-104 °F ~ 165 °F)
开关类型	Press - to - talk
电缆线	∅ 6.3mmx3.4M (∅ 1/4 "x11ft)
重量	含线 250g (8.8oz) 托架 20g (0.7oz)

PRA535NC 频率响应图

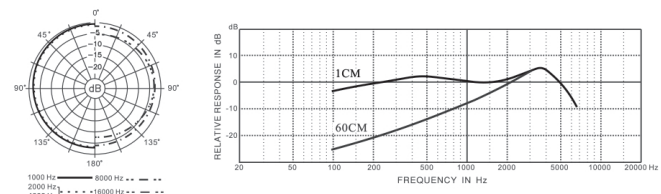

PRA535NC NOISE-CANCELING HANDHELD DYNAMIC MICROPHONE


Description

PRA-535NC is a noise-canceling handheld dynamic microphone. Its transducer features high reliability and advanced acoustic construction design; this makes it effective in resisting the ambient noise so as to perform a high level of intelligibility. PRA-535NC is an ideal candidate for speech communication in noisy and traveling environments such as in vehicles, vessels and civil aircrafts, etc.

Features

- Excellent attenuation of the ambient noise
- Excellent in clearness of speech articulation and intelligibility
- Premium durability to high temperature, high humidity, vibration and dropping
- Corrosion-resistant body (against oil, acid and alkali)
- Press-to-talk switch, operation life for 200,000 times of use

Wiring Diagram

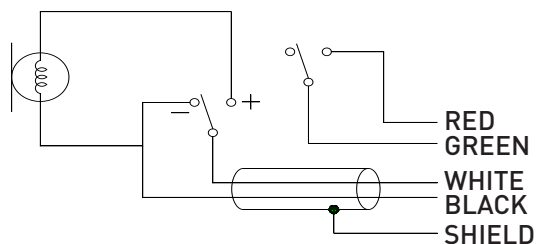

Specifications

Type	Noise-Canceling Dynamic
Frequency Response	10 to 5,000 Hz
Sensitivity	-66 dBV/Pa (0.5 mV/Pa)
Rated Impedance	200 Ω
Operation Temperature Range	-40°C ~ 74°C (-104°F ~ 165°F)
Switch Type	Press - to - talk
Cable	Φ 6.3 mm x 3.4M (Φ1/4" x 11ft)
Weight	250g (8.8oz.) (cable included) Bracket 20 g (0.7oz.)

PRA535NC Frequency Response

