



SN 115

SONATA Series

DESCRIPTION

SN 115 is a versatile high efficiency 2-way vented loudspeaker system.

The low end utilizes a high efficiency 15" low frequency speaker with 3" voice coil.

The high end makes use of a 1.0" exit compression driver with 1.75" titanium diaphragm, coupled to a constant

FEATURE


- 2-way vented loudspeaker system
- 15" speaker
- 1.75" compression driver with constant directivity horn
- 500 W power handling
- Highly resistant Polypropylene enclosure

SPECIFICATIONS


RMS Power Handling	500W
Program Power Handling	1000W
Peak Power Handling	2000W
On-axis Frequency Range	45Hz-16KHz
Nominal Impedance	8Ω
On-axis Sensitivity 1 W/1 m	98 dB SPL
Rated Peak SPL at Full Power	131dB
Nominal -6 dB Beamwidths	
Horizontal	105°
Vertical	75°
Enclosure Material	Polypropylene
Color	Black
LF Transducers	15"(L15P)
HF Transducers	1.75" (H44M)
Connector	2 Paralleled NL4 , wired as ±1
Dimensions (H × W × D)	730x495x390mm
Wight	21.0kg



FREQUENCY RESPONSE

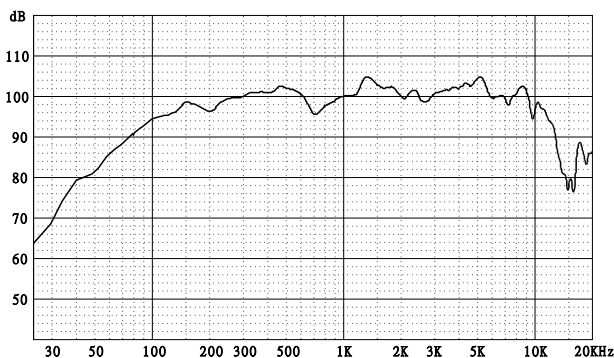

IMPEDANCE

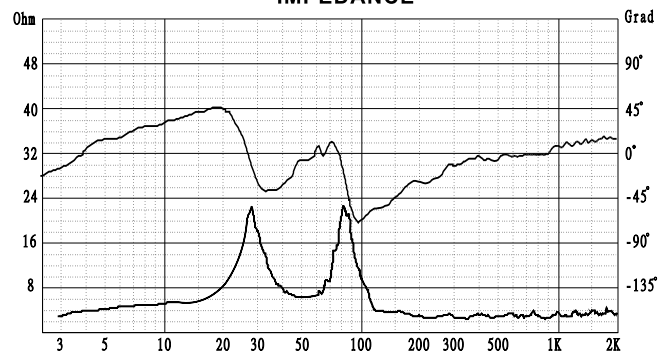

GOANG-FANN CO.,LTD.

3F, No.7, Alley 2, Lane 342, Fu-Der 1st Road
Hsichih, Taipei, Taiwan

Tel: 886-2-26931323 Fax: 886-2-26948990

E-mail: sales@tenlux.com.tw

Http://www.superlux.com.tw