

# SN 112

## SONATA Series

### Description

Sn112 is a versatile high efficiency 2-way vented loudspeaker system. The low end utilizes a high efficiency 12" low frequency speaker with 2" voice coil.

The high end makes use of a 1.0" exit compression driver with 1.75" titanium diaphragm, coupled to a constant directivity horn.

### Features


- 2-way vented loudspeaker system
- 12" speaker
- 1.75" compression driver with constant directivity horn
- 300 W power handling
- Highly resistant polypropylene enclosure

### Specifications

- RMS Power Handling: 300W
- Program Power Handling: 600W
- Peak Power Handling: 1200W
- On-axis Frequency Range: 50~14KHz
- Nominal Impedance: 8Ω
- On-axis Sensitivity 1W/1m: 98dB SPL
- Rated Peak SPL at Full Power: 129dB
- Nominal-6dB Beamwidths: Horizontal 105°  
Vertical 75°
- Enclosure Material: Polypropylene
- Color: Black
- LF Transducers: 12"(L12P)
- HF Transducers: 1.75"(H44M)
- Connector: 2Paralleled NL4,wired as ±1
- Dimensions(HXWXD): 580X420X310mm
- Weight: 14.0Kg



**FREQUENCY RESPONSE**

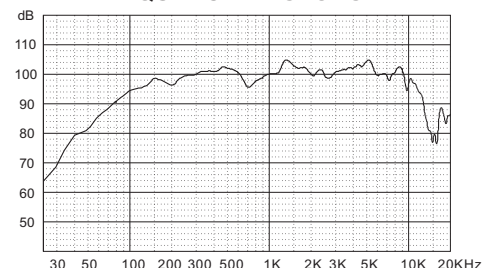

**IMPEDANCE**

