

PRA383TQG(same with WB383)

PRA383XLR

PRA383DXLR

Superlux®
舒伯乐

Microphone for the Miking and Recording of Musical Instruments

Description


PRA383TQG(same with WB383) PRA383XLR PRA383DXLR are designed for the miking and recording of brass and stringed instruments and TOM-TOM drum. With high sound pressure capability and miniature shapes, they are ideal for the miking in tough onstage usage. The integrated gooseneck and clip provide great convenience in installing, and enable the user to appreciate music with optimum mobility. Among them, WB383 is applicable for wireless system.

Features


- Cardioid, high gain before feedback
- Gooseneck with clip, can be easily installed to any brass and stringed instruments
- PRA383TQG(same with WB383) is equipped with a cable of 1.5 M with a Tini Q-G (TA4F) plug
- PRA383XLR is equipped with a cable of 1.5 M with a Tini Q-G (TA3F) plug, one PS418S power supply with XLR connectors
- PRA383DXLR is equipped with a cable of 1.5 M with a Tini Q-G (TA3F) plug, one PS418D power supply (for battery and phantom) with XLR connectors

Specifications


Type:	Condenser Microphone
Polar Pattern:	Cardioid
Frequency Response:	40~18000Hz
Sensitivity:	-42dBV/Pa (8mV/Pa)
Rated Impedance:	200Ω
Equivalent Noise Level:	23dB (A weighted IEC/DIN 651)
Max. SPL:	137dB (THD≤0.5% 1000Hz)
Dynamic Range:	114dB
Power Supply:	PRA383XLR: 48V Phantom power(IEC 268-15/DIN 45596); PRA383DXLR: Both phantom and battery powered
Current Consumption:	3.5mA
Connector:	Φ20x150mm
Weight:	160g (accessories excluded)



PRA383TQG (同WB383)



PRA383DXLR

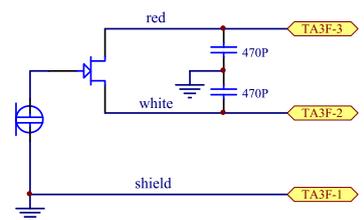

PRA383XLR

