



SA 118S

演奏系列

概述

SA118S高效率倒相式超重低音音箱，動力澎湃，絕對是樂隊演出擴聲系統的首選，同樣適用於樂器演奏，迪斯科，歌舞廳，演唱會等需要高強度低音效果的場合。

SA118S是專門為需要高質量低音效果的場合設計，無論是流動演出還是固定按裝系統，長期使用功能穩定。柔和而又富有彈性的低頻給人舒適的感覺，其小巧的外形更能滿足用戶多方面的需求。在SM系列中與其它全頻音箱組合使用，不僅聲音質量高，而且便於按裝。

低音單元是由18吋低音紙盆和4吋銅包鋁扁線音圈支架組成的，聲音極具穿透力，低頻反應速度靈敏，效率高。

特徵


- 倒相式超重低音音箱
- 18英吋低音單體
- 600W功率承載
- 高強度多層板(CLB)箱體
- 梯形箱體設計，多功能用途
- 凹陷式把手設計，更牢固安全

技術數據

RMS平均功率	600W
音樂功率	1200W
峰值功率	2400W
頻率響應	35Hz-1KHz
輸入阻抗	8Ω
輸入靈敏度	100 dB SPL
最大控制聲壓級	133 dB
箱體材料	多層板(CLB)
顏色	黑色
低音單元	18吋 (L18AS)
輸入接口	2xNL4，連接至±1
箱體尺寸(高×寬×長)	670×550×700 mm
箱體重量	38.0Kg



頻響曲線圖

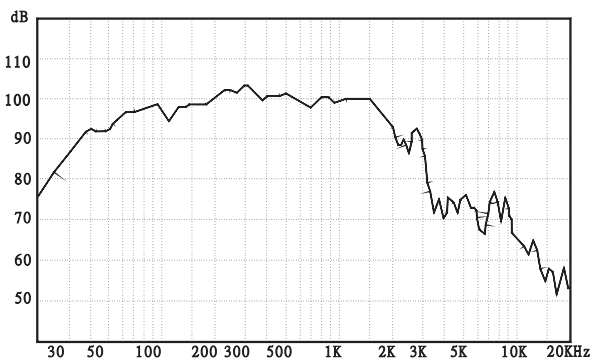

廣 範 實 業 有 限 公 司
GOANG-FANN CO., LTD.
台北縣汐止市福德一路342巷2弄7號3樓

Tel: 886-2-26931323 Fax: 886-2-26948990
E-mail: sales@tenlux.com.tw
Http://www.superlux.com.tw



SM 118S

MUSICAL Series

DESCRIPTION

SM 118S is a high efficiency paraphrase sub-woofer with persistent dynamic. It is surely an ideal companion for the reinforcement system of band performance. It can also be used in other occasions such as, disco, theater, outdoor performance and vocal concert, which desire the effect of bass sound effect.

SM 118S can produce a desired bass for both traveling performance and stationary installment. It guarantees a stable performance in long-term operation. And the soft and punchy bass is nice to the ear. With its mini shape, SM 118S can be easily matched with other members of SM series to satisfy various demands of the user.


The low end unit consists of one 18" bass cone and one 4" coil support of aluminum band coated with copper. The low end has a sensitive response and offers a penetrating sound with a high efficiency.

FEATURES

- Paraphrase sub-woofer loudspeaker
- 18" speaker
- 1.75" compression driver with constant directivity horn
- 600 W power handling
- Highly intensity CLB enclosure.
- Gradient enclosure, suitable for various applications.
- Molded-in handle for easy carrying and stable stacking.

SPECIFICATIONS

RMS Power Handling	600 W
Program Power Handling	1200 W
Peak Power Handling	2400 W
On-axis Frequency Range	35-1KHz
Nominal Impedance	8Ω
On-axis Sensitivity 1 W/1 m	100 dB SPL
Rated Peak SPL at Full Power	133 dB
Enclosure Material	Continuous Layer Board
Color	Black
LF Transducers	18 speaker(L18AS)
Connector	2 Paralleled NL4 , wired as ±1
Dimensions (H×W×D)	670×550×700 mm
Weight	38.0Kg

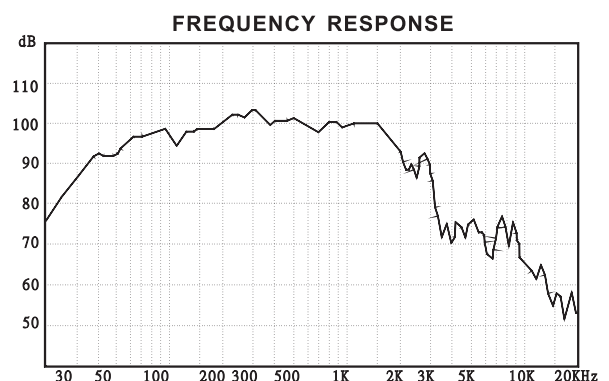

GOANG-FANN CO.,LTD.
3F, No.7, Alley 2, Lane 342, Fu-Der 1st Road
Hsichih, Taipei, Taiwan

Tel: 886-2-26931323 Fax: 886-2-26948990
E-mail: sales@tenlux.com.tw
Http://www.superlux.com.tw