



E205 Studio Condenser Microphone

Designed for critical home/project/professional studio applications and live performances, this side-address supercardioid studio condenser delivers exceptional detail and low noise. Along with its rugged construction and high-performance specifications, the E205 provides an exceptional level of consistency from model to model.

- Large diaphragm for smooth, natural sound and low noise
- High SPL handling and wide dynamic range provide unmatched versatility
- Supercardioid polar pattern reduces pickup of sounds from the sides and rear, improving isolation of desired sound source

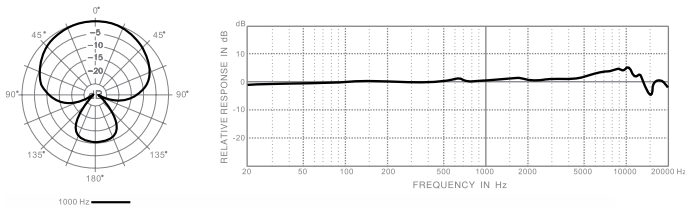

Package

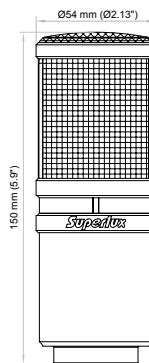

Type	Back electret condenser
Polar Pattern	Supercardioid
Frequency Response	30-18,000 Hz
Sensitivity	-38 dBV/Pa (12.6 mV)
Output Impedance	200 Ω
Min. Load Impedance	1,000 Ω
S/N Ratio	72 dB
Equivalent Output Noise	< 22 dB SPL
Max. SPL	> 135 dB SPL
Dynamic Range	> 113 dB
Power Requirements	12-52V DC, 3.5 mA
Finish	Black
Connector	XLR3M
Dimensions	Ø54 x 150 mm Ø2.13" x 5.9"
Net Weight	400 g (14.1 oz)
Accessories Furnished	HM85 adapter, YA2 threaded adapter Pouch




Optional Accessories HM56B shock mount




E205 錄音棚電容麥克風

E205是為了標準的家庭/工作室/專業錄音棚及現場演出而設計，此側向拾音錄音室電容麥克風重現極佳的細節及極低的噪聲。堅固的結構加上高規格的電氣特性，使E205突出於一般的機種。

- 抗噪大震膜音頭，呈現平順且自然的音色和極低的噪聲
- 能承受高聲壓並具有寬的動態範圍，能配合各種不同的應用
- 超心型指向強調軸向的音源，同時排除側向及背面的干擾

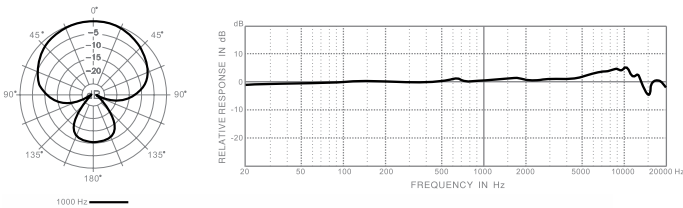

包裝

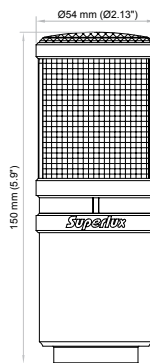

音頭	背駐極電容
指向性	超心型
頻率響應	30-18,000 Hz
靈敏度	-38 dBV/Pa (12.6 mV)
阻抗	200 Ω
最小負載	1,000 Ω
信噪比	72 dB
等效噪聲SPL	22 dB (A計權, 按IEC/DIN651)
最大聲壓SPL	>135 dB (諧波失真≤1%1000Hz)
動態範圍	>113 dB
電源需求	12-52V DC, 3.5mA
表面塗裝	黑
接頭	XLR3M
尺寸	Ø54 × 150 mm
淨重	400 g
隨貨附件	HM85旋轉接頭、YA2轉換螺母、便攜袋




選購配件 HM56B防震架



E205 录音棚电容麦克风

E205是为了标准的家庭/工作室/专业录音棚及现场演出而设计，此侧向拾音录音室电容麦克风重现极佳的细节及极低的噪声。坚固的结构加上高规格的电气特性，使E205突出于一般的机种。

- 抗噪大震膜音头，呈现平顺且自然的音色和极低的噪声
- 能承受高声压并具有宽的动态范围，能配合各种不同的应用
- 超心型指向强调轴向的音源，同时排除侧向及背面的干扰

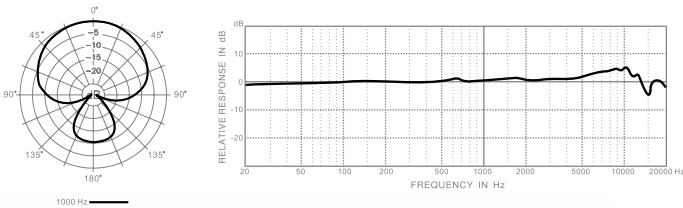

包装



音头	背驻极电容
指向性	超心型
频率响应	30-18,000 Hz
灵敏度	-38 dBV/Pa (12.6 mV)
阻抗	200 Ω
最小负载	1,000 Ω
信噪比	72 dB
等效噪声SPL	22 dB (A计权，按IEC/DIN651)
最大声压SPL	>135 dB (谐波失真≤1%1000Hz)
动态范围	>113 dB
电源需求	12-52V DC, 3.5mA
表面涂装	黑
接头	XLR3M
尺寸	Ø54×150 mm
净重	400 g
随货附件	HM85旋转接头、YA2转换螺母、便携袋



选购配件 HM56B防震架

