

SN 110

SONATA Series

Description

Sn110 is a versatile high efficiency 2-way vented loudspeaker system. The low end utilizes a high efficiency 10" low frequency speaker with 2" voice coil.

The high end makes use of a 1.0" exit compression driver with 1.75" titanium diaphragm, coupled to a constant directivity horn.

Features


- 2-way vented loudspeaker system
- 10" speaker
- 1.75" compression driver with constant directivity horn
- 200 W power handling
- Highly resistant polypropylene enclosure

Specifications

- RMS Power Handling: 200W
- Program Power Handling: 400W
- Peak Power Handling: 600W
- On-axis Frequency Range: 65~16KHz
- Nominal Impedance: 8Ω
- On-axis Sensitivity 1W/1m: 94dB SPL
- Rated Peak SPL at Full Power: 123dB
- Nominal-6dB Beamwidths: Horizontal 105°
Vertical 75°
- Enclosure Material: Polypropylene
- Color: Black
- LF Transducers: 10"(L10P)
- HF Transducers: 1.75"(H44M)
- Connector: 2ParalleledNL4,wiredas±1
- Dimensions(HXWXD): 530X340X310mm
- Weight: 12.0Kg



FREQUENCY RESPONSE

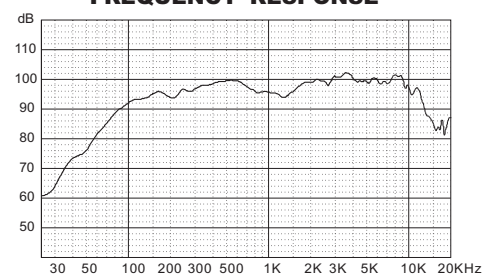

IMPEDANCE

