



MA208W

Wireless Portable PA System

Outdoor events / Buskers / Public / Speakers / Vocalists / Performers

General Description

The MA208W is a totally mobile, self-contained sound system. The unit comes with a two-way 8-inch speaker system, built-in amplifier, rechargeable battery and two wireless microphones. A built-in handle makes travel easy. Other important features include a 3-channel mixer with two mic/instrument and one wireless channels. A two-band equalizer is built-in for perfect sound adjustment. A Line Out with 1/4" phone jack enables two MA208W to be linked together. The unit also features protection circuitry and the capability of tripod stand mount. All of these features combine to make the MA208W a must-have for traveling presentations, small conferences, schools, classrooms, touring bands, clubs and karaoke. There is also an optional item of MA208, which is similar with MA208W but not including wireless system.

Features


- All-in-one compact mobile wireless sound system, powered by an internal rechargeable battery
- 8-inch two-way speaker system and a 40-watt power amplifier are built-in
- 3-channel mixer incl. two mic/instrument, and one wireless channels with individual volume control
- A link out for expanding your sound system with additional MA208W unit
- VHF wireless receivers are built-in and includes two handheld transmitters
- Onboard two-band EQ for perfect sound adjustment
- Built-in DC charging circuit
- Built-in rechargeable battery provides 8-10 hours operation
- DC inlet for external power supply
- Speaker can be used as main or floor monitor

Options

MA208W models	<ul style="list-style-type: none"> • MA208W, including two transmitters with microphones • MA208, without wireless system
VHF Wireless	<ul style="list-style-type: none"> • VT6 handheld transmitter • VT7 bodypack transmitter: require hands-free microphone and options includes: <ul style="list-style-type: none"> ◆ E12A/3.5 mm lavalier ◆ E10B/3.5 mm headset
Accessories	<ul style="list-style-type: none"> • PRAD1 Dynamic handheld wired microphone • SPS410B Speaker stand



System includes:
1 × MA208W
2 × VT6 handheld transmitters
1 × External power supply




Specifications

Wireless System	Two VHF wireless receivers built-in, carrier frequency 170M – 270M Hz
Max. Output Power	40 W
Frequency Response	62 Hz ~18,000 Hz
THD	<1%
Speaker Drivers	LF: 8" (20 cm) Cone HF: 1" (2.54 cm) Compression Driver
Audio Inputs	2 × XLR/1/4" Combo jacks: XLR for microphone and 1/4" for instrument 3.5 mm (1/8") stereo mini input jack for line source
Audio Output	6.3 mm (1/4") phone jack for recorder or additional MA208W
Power Requirements	Internal 1x 12 V/7.5 AH recharging battery or external power supply
Recharging Time	5 hours charging, 8-10 hours operation
Enclosure Material	PP
Finish	Black
Dimensions(HxWxD)	455 × 275 × 265 mm (17.9 × 10.8 × 10.4 inch)
Net Weight	10 kg (22 lbs)
Furnished Accessories	Two wireless transmitters with microphones, 100-240 VAC Switching power supply

*Specifications are subject to change without notice.

Controls and Connectors

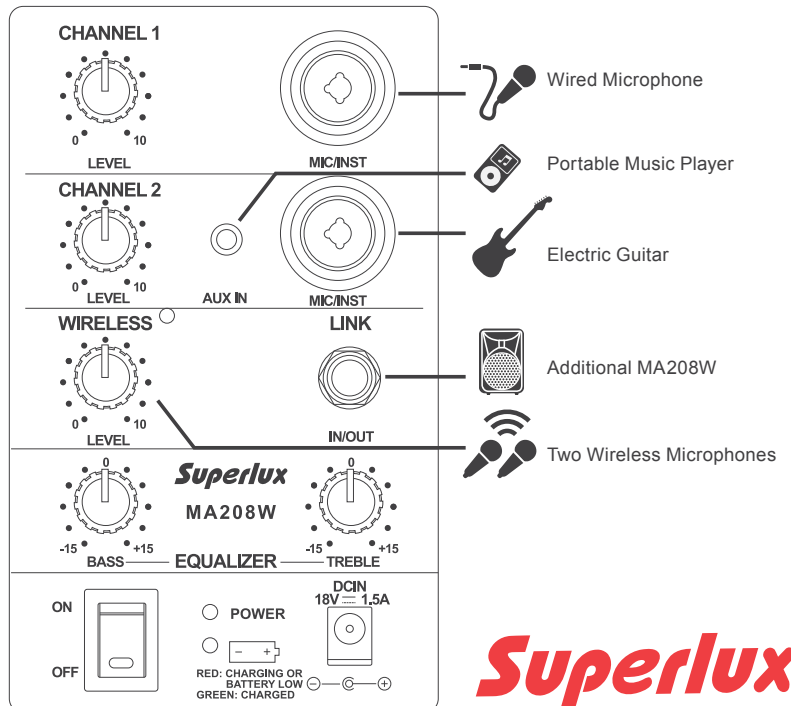

www.superlux.com.tw



無線系統 電池供電

MA208W

便攜式無線擴聲系統

戶外活動使用 / 街頭藝人 / 公共演講者 / 歌手 / 表演人士

簡述


MA208W是一完整便攜式無線擴聲系統。包括8吋兩音路喇叭、功放、充電電池及兩支VHF無線麥克風。提把的結構，易於攜行。其他特色包括3音路調音台，含兩路麥克風/樂器輸入接口及無線麥克風聲軌，並加上兩段式均衡器可協助調整出最佳的聲音。一個輸出可連接至另一個MA208W，以擴充音響系統。系統中內置保護電路，並可角架安裝作為主喇叭或橫躺在舞台上作為監聽音箱使用。MA208W非常適用於小型會議、學校、教室、旅行樂團、俱樂部及小型PA使用。另有MA208機型，其功能與MA208W相同，但不具有無線系統。

特色

- 電池供電整合式便攜無線擴聲系統
- 八吋兩音路喇叭系統含40瓦功放
- 內置3音路調音台含有兩個麥克風/樂器輸入聲軌及無線麥克風聲軌，各具獨立音量控制
- 連接輸出可接至另一台MA208W，以擴充音響系統
- 內置一對無線接收機及配有一對手持無線麥克風
- 內置兩段式均衡器以調出最佳音色
- 內置直流充電線路
- 充電電池可連續使用8-10小時
- 提供外部直流電源供應器輸入接口
- 可安裝在音箱腳架上或橫躺作為舞台監聽音箱使用

擺放位置

反饋監聽或腳架上



系統及配件選擇

MA208W 機型	<ul style="list-style-type: none"> • MA208W，包含兩支無線麥克風 • MA208，功能同MA208W，但不含無線系統
可搭配使用之 VHF無線麥克風	<ul style="list-style-type: none"> • VT6 手持麥克風 • VT7 腰包發射器：需搭配免手持麥克風，有以下選擇： <ul style="list-style-type: none"> ◆ E12A/3.5 mm 領夾式 ◆ E10B/3.5 mm 頭戴式
選購配件	<ul style="list-style-type: none"> • PRAD1 動圈式手持無線麥克風 • SPS410B 音箱腳架



系統包括


- 1× MA208W主機
- 2× VT6手持無線麥克風
- 1× 電源供應器

規格

無線系統	內置兩組VHF接收機，載波頻率170M-270M Hz
最大輸出功率	40 W
頻率響應	62 Hz ~18,000 Hz
總諧波失真	<1%
喇叭單元	8吋低音及1吋壓縮式高音喇叭
輸入接口	XLR/6.3 mm combo 插座：XLR卡農接口接麥克風，6.3 mm接口接樂器 3.5 mm接口：接掌上型音樂播放器
輸出接口	6.3 mm 插座
電源供應	內置一個12 V/7.5AH充電電池
充電	5小時充電，可使用8-10小時
箱體材質	PP
顏色	黑
尺寸	455 × 275 × 265 mm
淨重	10 kg
隨貨附件	兩支無線麥克風及100-240V AC切換式電源供應器

*規格若有變更，以實際產品為準。

控制功能及接口

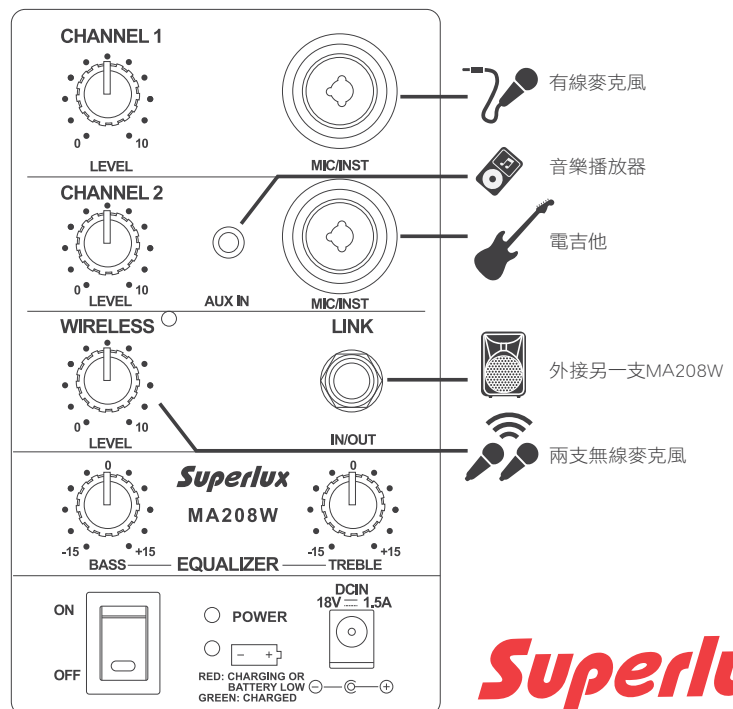

Superlux®

www.superlux.com.tw